

# MODEL 584LB INNOVATION<sup>[E]</sup>

FOR EMPTY CONTAINER HANDLING  
WITH LIFT TRUCKS



## Standard supply includes:

- ◆ Integrated mounting to fit the truck
- ◆ Powered pile slope (PPS)
- ◆ Mechanical pile slope (MPS), floating function in the end-posts
- ◆ Two lifting hooks
- ◆ Two hydraulic side clamps for securing the containers
- ◆ Hydraulic telescoping
- ◆ Hydraulic sideshift
- ◆ Solenoid valves for all hydraulic functions
- ◆ Electrical container detection system
- ◆ Electric telescoping protection system
- ◆ Lift interrupt signal
- ◆ LED indication lights
- ◆ LED work lights

**The ELME Spreader Model 584LB INNOVATION is the New Generation telescopic side lift spreader with 11 tonnes capacity for handling of two empty ISO/reefer containers simultaneously. 584LB INNOVATION engages and secures two containers with two horizontal lifting hooks and side clamps.**

The spreader is designed to be integrated in the mast of a forklift truck and can handle one or two containers in 20 to 40ft. Special for 584LB INNOVATION is that the spreader also can handle one 45ft container in 40ft's corner castings and drive 10 km/h in lifted mode with any container size.

## INNOVATIVE DESIGN

INNOVATION's unique 11 tonnes capacity designed for heavy duty double handling applications, combined with handling eccentric load, makes it possible to handle double reefer containers with the refrigeration units aligned.

The new and improved design implies a reinforced spreader with an increased structural strength, enhanced durability, beneficially designed Power pile slope (PPS), optimized hydraulic system, increased visibility for the driver and numerous other improvements for an outstanding functionality.

## LIFTING HOOK SYSTEM





The lifting hook principle offers the following features:

- ◆ Two lifting hooks enter the side apertures of the top corner castings of the lower container and two hydraulic side clamps will enter the apertures of both containers.
- ◆ ISO, including reefer containers, and Binnen-containers can be picked up without any modifications to the spreader.

## CONTROL AND PROTECTION SYSTEM

The ELME Neuron CAN bus system, designed for maximum robustness, monitors the state of the spreader at all times. Indicator lights advise the operator when the spreader is correctly seated, locked or not locked. Each signal is a precondition for the important protection functions of the spreader such as side clamp activation, telescoping and lift interrupt. Neuron uses J1939 protocol which provides fault code messaging to alert driver and maintenance personnel of possible component failures.

# MODEL 584LB INNOVATION<sup>[E]</sup>

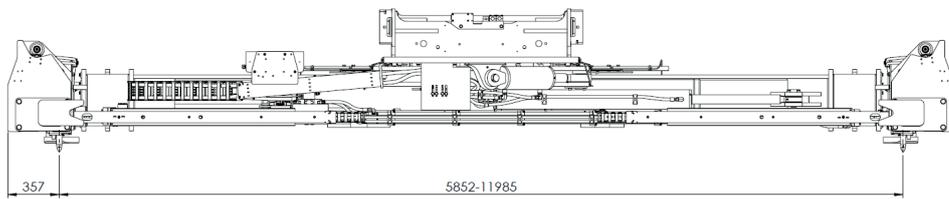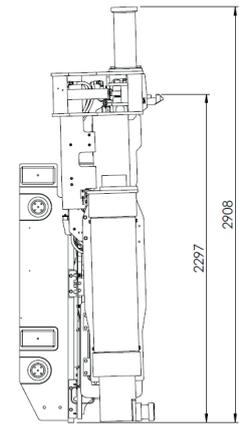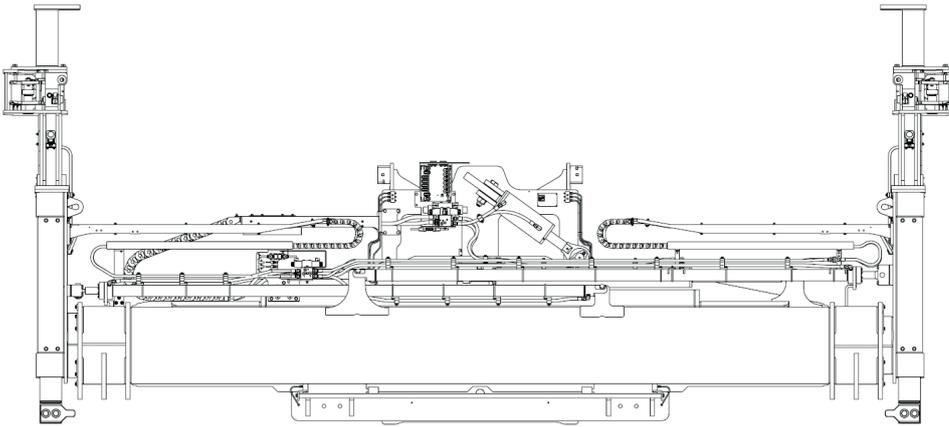

Improved side clamp design.


## TECHNICAL SPECIFICATIONS

Type of lifting system	Two lifting hooks with side clamps
Type of stacking	Normal and block stacking
Spreader weight (TW)	4 500 kgs
Carriage weight (PPS)	1 900 kgs
Lifting capacity (SWL)	11 tonnes
Telescopic positions	20 and 40ft
Telescoping speed, 20-40ft	< 12 sec.*
Telescoping speed, 40-20ft	< 14 sec.*
Sideshift	± 600 optional ± 400 mm
Mechanical pile slope (MPS), vertical floating end-posts	At 20ft position: approx. 200mm At 40ft position: approx. 200mm
Powered pile slope (PPS)	± 6°
Hydraulics, operating pressure up to	140 bar
Hydraulics, flow	40-60 L/min
Electric - control voltage	24 VDC
Communication	CAN 2.0B
Colour	Black grey RAL 7021

\* Calculated speed at 60 L/min



Improved design with built-in cabling and larger bending radius for hydraulic hose between pocket and end-post.

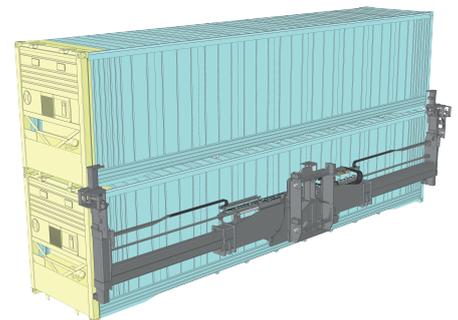

Double handling of reefer containers with the refrigeration units aligned.

All specifications are subject to change without notice. A list of options enables you to adapt the product more precisely to your needs and further information is available on request.

### HEAD QUARTER AND PRODUCTION

#### ELME Spreader AB

Phone +46 476 558 00  
Email sales@elme.com  
Website www.elme.com

### SALES AND SPARE PARTS

#### ELME Spreader Trading (Shanghai) Co., Ltd

Phone +86 21 5169 8922  
Email sales.cn@elme.com

### SPARE PARTS

#### ELME Americas Inc.

Phone +1 731 588 02 20  
Email sales.us@elme.com

For details, spare parts and more products, visit [www.elme.com](http://www.elme.com).

**ELME**<sup>TM</sup>  
Swedish Spreader Systems